

**TA35 INVB**

**ELEVATIONS AND OVERALL DEPTHS**


Elevations Standard Sash	0-7 mm
	7 mm
Elevations Standard Frame	69 mm
	96 mm
Elevations Standard Curtain Wall	112 mm
	138 mm
	158 mm
Depths Standard Wood Profile	68 mm
	78 mm
	88 mm

**MAXIMUM SASH SIZES**

Width Sash Max	1.600 mm
Height Sash Max	3.000 mm
Weight Sash Tilt/Turn	200 kg
Weight Sash Side Hung	300 kg

**FINISH + CORNER JOINT ALUMINIUM**

RAL, NCS, DB	welded
RAL, NCS, DB	mechanical
Anodised	mechanical

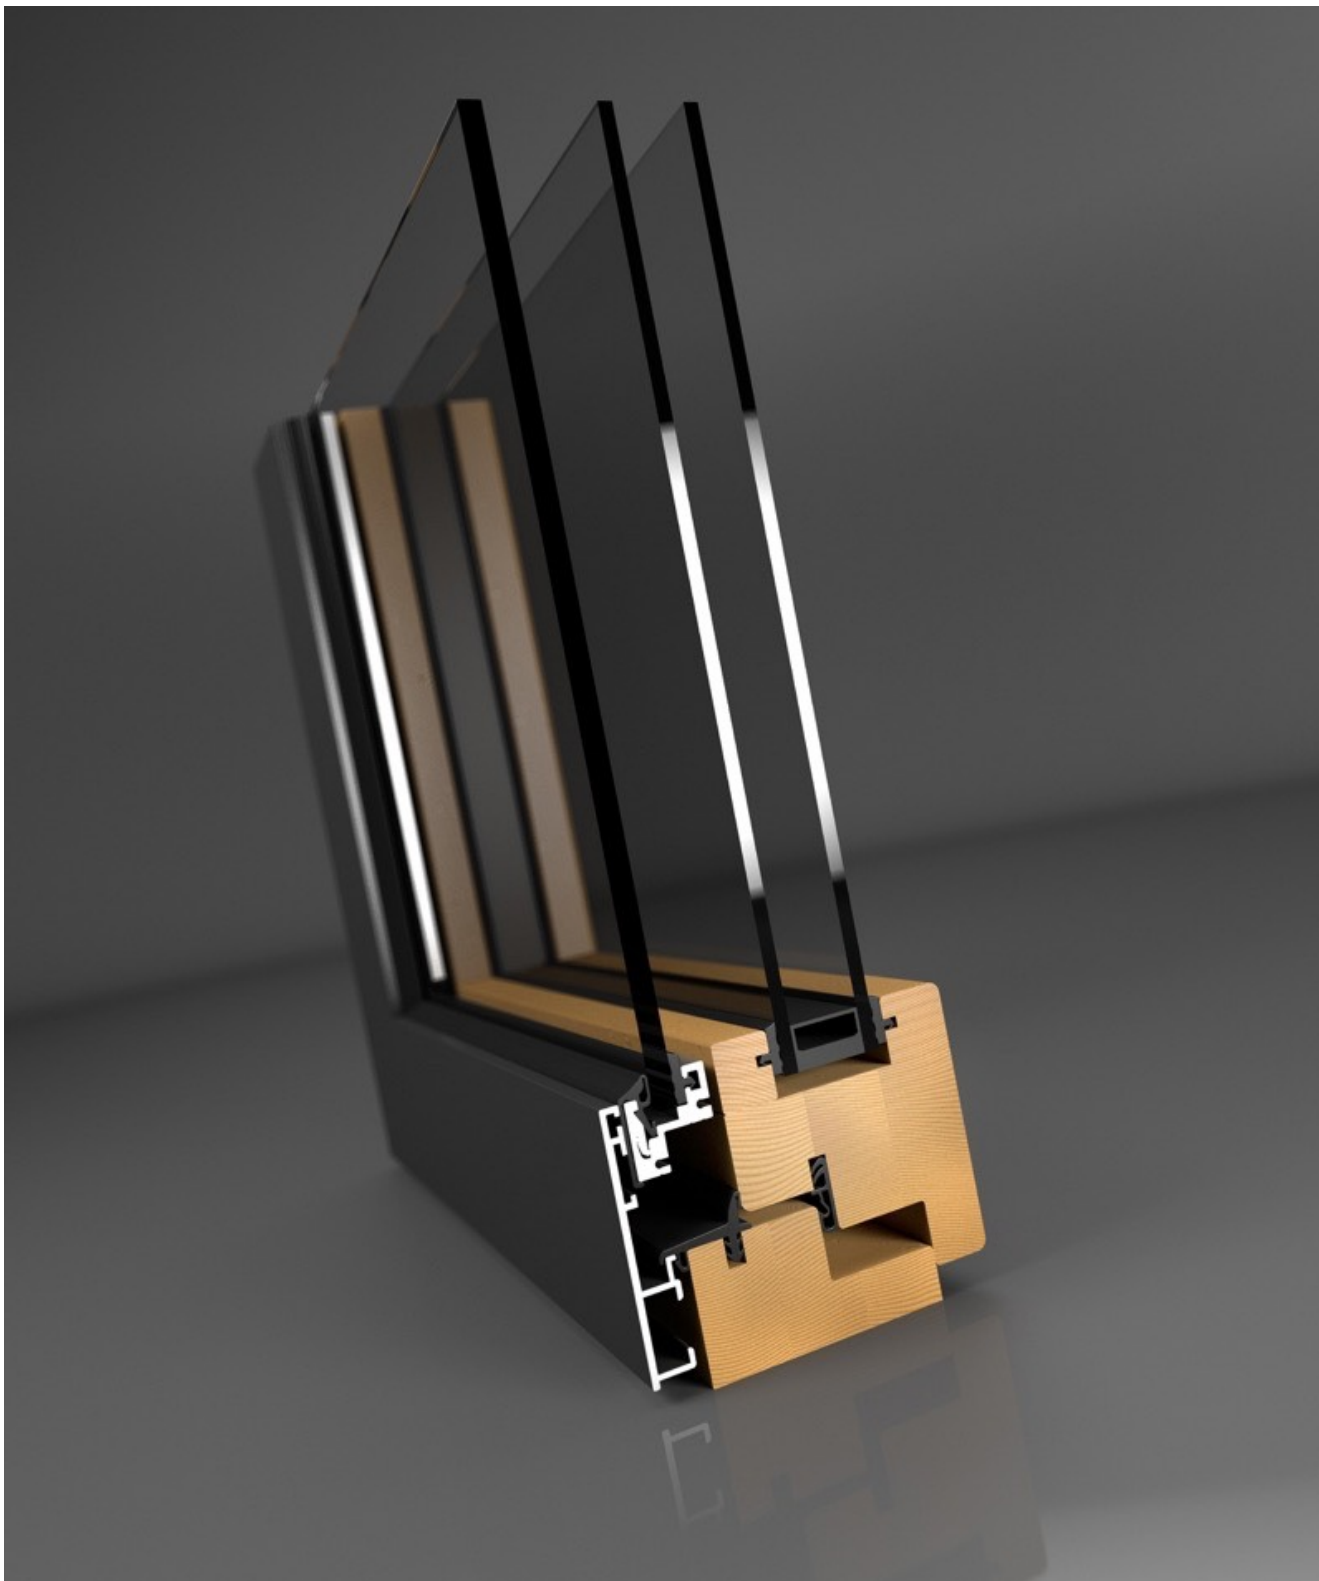

**NORMS + VALUES: CE: EN 14351-1**

DIN EN 12207 Air Impermeability Class 4
DIN EN 12208 Driving Rain Resistance Class E900
DIN EN 12210 Wind Load Resistance Class C4
DIN EN ISO 10077-2 $U_w \geq 0,70 \text{ W/(m}^2\text{K)}$
DIN EN ISO 717-1 Noise Control: $R_w \text{ (C; Ctr) = 46 (-2; -6) dB}$
DIN EN 1627 Burglary Resistance: RC1N, RC2N, RC2
DIN 18008-4 TRAV Anti Drop Device: Category A, B, C

**WOOD TYPES**

Spruce
Fir
Larch
Pine
Douglas Fir
Hemlock
Oak

Glas pane must at least be fully toughened

